





EQUINOX CORPORATION

REDEFINING SENSOR TECHNOLOGY FOR A CHANGING WORLD


3-CCD MULTISPECTRAL/POLARIMETRIC CAMERA

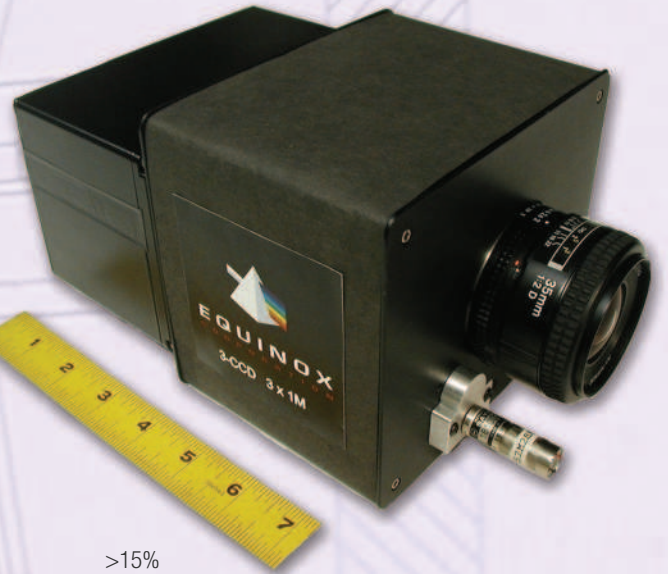

Intensity View

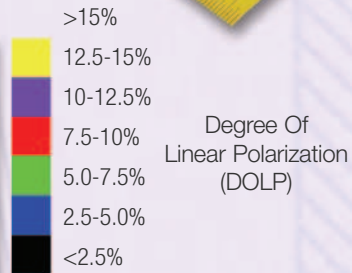

Polarization Orientation



- THREE CHANNELS 1024x1024 RESOLUTION, 12-BIT DYNAMIC RANGE
- HIGHEST COLOR SPATIAL RESOLUTION WITH 12-BIT DYNAMIC RANGE COMMERCIALY AVAILABLE. FIRST EVER REAL-TIME POLARIMETRIC VIDEO CAPABILITY.
- USES EQUINOX PROPRIETARY OPTICAL BEAMSPLITTER TECHNOLOGY ENABLING MODULAR MULTISPECTRAL OR POLARIMETRIC CONFIGURATIONS.

FRAMERATE: 15 FPS
28 FPS WITH 2x2 BINNING

FORM FACTOR: 7.5"D x 6"W x 4.75"H

POWER REQUIREMENT: 17 WATTS

LENSES: F#2 SYSTEM COMPATIBLE WITH ANY NIKON F-MOUNT LENS

EQUINOX CORPORATION

9 West 57th Street, Suite 1650
New York, New York 10019



Phone: 212-421-2999 • Fax: 212-421-7004
e-mail: info@equinoxsensors.com • web: www.equinoxsensors.com